

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. CT-317

First Inventor or Application Identifier Wayne Huang, et al.

Title DVD Subpicture Rendering Without Loss

Express Mail Label No. EL209954393US

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification (Total Pages)
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) (Total Sheets)
4. Oath or Declaration (Total Pages)
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.83(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.83(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS) PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: _____

NOTE FOR ITEM 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED ON C.F.R. § 1.27, EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON ON C.F.R. § 1.29.

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	David B. Ritchie				
	D'Alessandro & Ritchie				
Address	P.O. Box 640640				
City	San Jose	State	CA	Zip Code	95164-0640
Country	USA	Telephone	408-441-1100	Fax	408-441-8400

Name (Print/Type)	Marc S. Hanish	Registration No. (Attorney/Agent)	42,626
Signature		Date	12/8/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:) Art Unit:
Wayne Huang and Maximino Vasquez) Examiner:
Serial No. [Not yet assigned])
Filed: December 8, 1999)
For: DVD SUBPICTURE RENDERING)
WITHOUT LOSS OF COLOR)
RESOLUTION)

CERTIFICATE OF MAILING

"Express Mail" mailing label no: EL209954393US

Date of Deposit: December 8, 1999

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:

Box Patent Application
 Assistant Commissioner for Patents
 Washington, D.C. 20231


 Tara Haydem
TRANSMITTAL LETTER

Honorable Assistant Commissioner
 for Patents
 Box Patent Application
 Washington, D.C. 20231

Dear Sir:

Enclosed for filing please find the patent application for an invention entitled, "DVD SUBPICTURE RENDERING WITHOUT LOSS OF COLOR RESOLUTION", filed on behalf of Chips and Technologies, LLC., assignee from inventors Wayne Huang and Maximino Vasquez, including Utility Patent Application Transmittal, 15 pages of specification, 7 pages of claims, 10 sheets of drawing figures, and one page of Abstract.


The attorney's Docket Number is CT-317.

Kindly address all communications regarding this application to:

David B. Ritchie
D'Alessandro & Ritchie
P.O. Box 640640
San Jose, CA 95164-0640
Telephone (408) 441-1100

No fee is being paid at this time.

Respectfully submitted,
D'ALESSANDRO & RITCHIE



Marc S. Hanish
Reg. No. 42,626

Dated: December 8, 1999

D'Alessandro & Ritchie
P.O. Box 640640
San Jose, CA 95164-0640
(408) 441-1100

This application is submitted in the name of inventors Wayne Huang and Maximino Vasquez, both assignors to Chips and Technologies, LLC, a Delaware Corporation.

5

S P E C I F I C A T I O N

DVD SUBPICTURE RENDERING WITHOUT LOSS OF COLOR RESOLUTION

10

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to the field of DVD (Digital Versatile Disk) technology. There are several types of DVD. This invention relates to DVD-video.

More specifically, the present invention relates to the rendering of a DVD-video subpicture on a computer system without loss of color resolution.

The Background

DVD technology has grown in popularity in recent years. Many households now own a DVD player next to their television sets. Even more dramatically, however, nearly every computer sold now has a DVD-ROM player built into it. There are several problems that are encountered when attempting to play DVDs on a computer that are not encountered when attempting to play them on a traditional DVD player.

25

When playing a DVD-video on a computer, it is necessary to convert the picture to one that not only can be displayed on a computer monitor, but also may be integrated in to the existing operating system being run. An operating system usually has a user interface containing one or more windows which may run different programs. When a

DVD is to be played on a computer, normally a new window must be open. However, other windows on the desktop may also be left open. Therefore, the video displayed in the DVD window must be of the same format (colors, resolution, etc.) as the rest of the desktop and the other windows in order to be properly displayed on the computer screen.

5

Another problem with displaying DVD video on a computer via hardware or software comes in how the video is decoded. DVD video is actually made up of two distinct pieces of video: the video and the subpicture. The video holds the data which is normally a movie or show, such as a direct translation of a film. The subpicture may hold other pieces of information specially designed for the DVD. This commonly includes things such as menus, closed captioning text, subtitles, etc. The video is encoded according to the MPEG-2 standard. The subpicture is encoded using run length encoding. The subpicture is a rectangle which can be any size up to the size of the video, and is blended with the video at a specified location.

10

15

20

Generally, a pixel of video information may be represented by RGB values (a value for each of the three primary colors - red, green, and blue) or by YUV values. A luminance value, denoted as Y, represents the brightness, or intensity, of a pixel. U and V are chrominance values, which together represent the color of a pixel in terms of hue and saturation. U and V are sometimes represented as C_r and C_b . C_b (representing blue information) is equal to $B - Y$ and C_r (representing red information) is equal to $R - Y$. The green value is not used in a separate color component since it can be derived by

subtracting the two difference signals from the Y signal. The YC_bC_r format is one type of YUV format, which generally refers to a form of color-difference video signal containing one luma and two chroma components.

5 The DVD video is encoded as MPEG-2, which uses a 4:2:0 YC_bC_r component digital video format, indicating that there is one C_b sample and one C_r sample for every four Y samples. This also indicates that there is 2:1 horizontal downsampling and 2:1 vertical downsampling for the chrominance samples in relation to the luminance samples.

10 The subpicture video stream, however, uses a format equivalent to a 4:4:4 YC_bC_r digital video format, indicating that C_b , C_r , and Y are sampled equally and there is no downsampling of the chrominance samples. This results in more color resolution being available for the subpicture than the video stream. The subpicture stream also contains information on how to blend each subpicture pixel with the corresponding video pixel.

15 The value which controls this blending is called the alpha value.

When the DVD is played, the video data is blended with the subpicture data to produce a single image on the screen. In the past, DVD decoders generally decoded the MPEG-2 video data into a video surface as a 4:2:0 YC_bC_r format picture. Then, the
20 subpicture was also decoded and converted to 4:2:0 YC_bC_r , then blended with the video by the DVD decoder, resulting in a loss of color resolution. Decoding the subpicture data, converting it to the primary surface color RGB format, then writing it directly into

the primary surface is generally not done because most primary surface color modes do not support an alpha value. Any RGB mode without an alpha value (24 bit or less primary surface) would require a fixed alpha to be used, thus dithering the data, which significantly reduces the quality of the subpicture data. This is due to the fact that the display pipeline (in the graphics chip) only knows how to read the video data in a single way for a particular primary surface color format. For example, if the primary surface is currently set to 24-bit RGB mode, the display pipe will be expecting data to be in an 8-8-8 format (8 bits for each of the red, green, and blue primary colors). It does not know how to handle any other format, and this format does not include an alpha component. Thus, the display pipe requires that the subpicture data be transformed into a format it can handle, resulting in the possible loss of subpicture resolution and a loss of the alpha values.

What is needed is a solution which allows for the blending of DVD subpicture data with DVD video data and graphics information without losing subpicture color resolution.

SUMMARY OF THE INVENTION

A method and apparatus for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture resolution includes inserting a key into the subpicture data during or right after decoding and storing the subpicture data in the

primary graphics surface. This key indicates whether the data is graphics (GUI) information or subpicture information. The key is then examined by hardware logic in the graphics chip, allowing other hardware logic to blend DVD subpicture data with DVD video data without losing subpicture color resolution. The key may be

5 implemented differently for different color modes of the primary surface, and may be unnecessary in certain modes.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram illustrating the components traditionally used to blend video, subpicture, and graphics information on a computer monitor.

FIG. 2 is a diagram illustrating how a color key may be used to combine graphics with video and subpicture.

FIG. 3 is a block diagram illustrating this format of DVD subpicture data for a single pixel.

FIG. 4 is a block diagram illustrating the organization of a presently preferred embodiment of the present invention.

FIG. 5 is a diagram illustrating a 32-bit chunk of data in 32-bit ARGB mode.

FIG. 6 is a diagram illustrating a 24-bit chunk of data in 24-bit RGB mode.

5 FIG. 7 is a diagram illustrating a 16-bit chunk of data in 16-bit RGB 565 mode.

FIG. 8 is a diagram illustrating a 16-bit chunk of data in 16-bit 555 RGB mode.

FIG. 9 is a flow diagram showing a method for rendering DVD subpicture data on
10 a computer system having graphics information without a loss of subpicture resolution in
accordance with a presently preferred embodiment of the present invention.

FIG. 10 is a block diagram illustrating a DVD subpicture data renderer in
accordance with a presently preferred embodiment of the present invention.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

In the following description, a preferred embodiment of the invention is described
with regard to preferred process steps and data structures. However, those skilled in the
20 art will recognize, after perusal of this application, that embodiments of the invention
may be implemented using at least one general purpose computer operating under
program control, and that modification of the general purpose computer to implement the

components, process steps, and/or data structures described herein would not require undue invention.

FIG. 1 is a block diagram illustrating the components traditionally used to blend video, subpicture, and graphics information on a computer monitor. DVD decoder 2, decodes the DVD information into video and subpicture information and blends them together. A graphics chip 4 receives the blended video and subpicture information in a video capture module 6. This blended video and subpicture information is then stored in memory 8, which contains a portion set aside solely for storing video data, also known as the video surface 10. The video surface 10 now contains video blended with subpicture.

Graphics to be displayed on the computer screen are stored in a primary surface 12 in memory 8. When it is necessary to display the graphics, video, and subpicture information on the computer monitor, a video engine 14 accesses the video surface 10 and then sends the blended video and subpicture information to an alpha blender 16. A graphics engine 18 does likewise with the graphics information. The alpha blender 16 then combines the blended video and subpicture, with the graphics information on the computer screen.

Pure software decoders work similarly, but write video and subpicture information directly into the video surface, bypassing the graphics chip 4 and capture module 6.

The primary surface may have many different formats. For 32-bit formats, ARGB is normally utilized which provides 8 bits for an alpha value, which represents the degree of transparency to be applied to a graphics pixel when combined with video or subpicture data. The alpha blender then uses this alpha field when blending the graphics with video or subpicture information. For formats less than 32-bit, a color key must be used. FIG. 2 is a diagram illustrating how a color key may be used to combine graphics with video and subpicture. One color, for example magenta, is set aside to indicate a location that is to contain video and/or subpicture information rather than graphics information. Any location on the screen, such as box 50, which contains that precise magenta color, will then display video or subpicture information. The alpha blender performs this task of combining the video or subpicture information into the correct portions of graphics information.

DVD subpicture data can be stored without information loss such that 8 bits of information are stored per pixel location. FIG. 3 is a diagram illustrating this format of DVD subpicture data for a single pixel. Four bits contain the alpha, information on how to blend the color from the table with the video data, while four bits contain an index to a color table indicating the color of the pixel. The alpha indicates the contrast or transparency level, with 0 being the subpicture is invisible and 15 being the subpicture is opaque.

The present invention provides a method and apparatus for blending subpicture data with video data using the primary surface in such a way that the subpicture color resolution and alpha values are not lost. How this works depends upon the current color mode of the primary surface. The invention will be described with relation to a primary surface of 32, 24, or 16-bit color resolution. However, one of ordinary skill in the art will recognize that other implementations are possible with other primary surface color resolution settings. Additionally, the preferred embodiment of the present invention is a combined software and hardware solution, however one of ordinary skill in the art will recognize that hardware only or software only embodiments of the present invention are also possible.

FIG. 4 is a block diagram illustrating the organization of a presently preferred embodiment of the present invention. A software translator 100 receives subpicture information from a software DVD decoder 102, while video information is sent to video surface 110 in memory 112. DVD decoder 102 would likely have been designed to combine separate video and subpicture streams since DVDs are encoded with separate streams, so separating out or requesting that the separate streams not be combined in the first place should not present a problem. To the extent that it does, however, an additional module may have to be placed after the DVD decoder 102 to separate out the subpicture and video streams. The present invention also assumes that the subpicture information received by the software translator 100 is in the standard 4:4 format. To the extent that it is not, it must be translated into that format.

The graphics chip 106 is also modified to include an alpha blender and subpicture overlay block 108 rather than simply an alpha blender. This is because the key potentially encoded into the stream by the software translator 100 needs to be encoded in some fashion. With a software DVD decoder 102, video capture module 104 may not have to be used. The details of this operation will be described later in this document.

It should be noted that the use of a software translator and hardware alpha blender and subpicture overlay block is only one possible embodiment of the present invention. One of ordinary skill in the art would recognize that such functions could be performed by hardware or software, and alternative placement of the blocks is possible.

The software translator and hardware logic (or other device in the display pipeline) are designed to utilize a key. The key is one or more bits that are transmitted with the RGB data and signifies whether the data is graphics or is subpicture information. In some cases the key is unnecessary, but in the most common formats (16 and 24 bit RGB) it is. The challenge in utilizing the key is that the hardware driver is still set up only to receive data that has a specific size. For example, in 24-bit RGB, the video driver is still designed only to receive data in 24-bit chunks. Thus any key must be designed to work within that limitation.

For a 32-bit primary surface, a key is probably unnecessary. FIG. 5 is a diagram illustrating a 32-bit chunk of data in 32-bit ARGB mode. As FIG. 5 shows, 32-bit ARGB mode provides for an 8-bit alpha field. For the subpicture, the software translator may simply write the contrast/transparency level into this 8-bit alpha field and the full resolution color information into the 24-bit RGB field. This allows for the direct writing of the subpicture information into the primary surface, preserving subpicture resolution. At that point, the subpicture may be treated as part of the normal graphics, and thus alpha blending of the video data and graphics data may be performed normally.

For a 24-bit primary surface, a 16-bit key is provided. FIG. 6 is a diagram illustrating a 24-bit chunk of data in 24-bit RGB mode. As FIG. 6 shows, in 24-bit RGB mode, video data has an 8-8-8 format (8 bits each for the red, green, and blue primary colors). The subpicture data is in the standard 4-4 format (4 bits for the alpha and 4 bits for the index). Thus the remaining 16 bits in the stream are open when subpicture data is stored in the primary surface. These 16 bits are used for the key.

The rationale behind using as many bits as possible for the key is that by reserving the bit combinations to indicate whether the stream is graphics or subpicture data, there will be a loss in the number of possible colors available for graphics data. This is due to the fact that the 8-8-8 RGB format does not provide any space for a key, and therefore bit combinations usually used for certain colors will have to be reserved for the key. If the number of possible colors is going to decrease, it is beneficial to have it decrease as little

as possible. One 16-bit combination must be set aside to indicate that the data is subpicture information. This results in 256 possible colors being lost for the video data. Which 256 colors are lost are determined by which 16-bit combination is chosen for the key. For example, if the first 16-bits are chosen to represent the key and the bit combination representing subpicture is [00000000 00000001], this precludes every possible value for the "blue" primary color (the last 8 bits) when combined with this bit combination. Thus, the 24-bit value [00000000 00000001 *****] is precluded from use in the video data, where * denotes either a 0 or a 1. The value chosen for the key is usually a value that is not used very often and is dark.

While this choice of bit combinations will work, any combination of bits can be chosen for the key. The specific bits which represent the key may be altered so as to achieve a more even distribution. For example, bits 0, 2, 4, 5, 6, 8, 10, 11, 12, 14, 15, 17, 19, 20, 21, and 23 may be chosen to represent the key (five bits of red, six bits of green, five bits of blue). The bits used are usually chosen to make it easy for the software to manipulate the key and the subpicture data. The hardware logic in the display pipe must be designed to handle whatever bits are chosen for the key.

For a 16-bit 565 video surface, an 8-bit key is used. FIG. 7 is a diagram illustrating a 16-bit chunk of data in 16-bit RGB 565 mode. As FIG. 7 shows, in 16-bit 565 RGB mode, video data has a 5-6-5 format (5 bits for red, 6 bits for green, 5 bits for blue). The subpicture data is still in the standard 4-4 format (4 bits for the alpha and 4

bits for the index). Thus the remaining 8 bits in the stream are open when subpicture data is sent. These 8 bits are used for the key.

One 8-bit combination must be set aside to indicate whether the data is subpicture information. This results in 256 possible colors being lost for the video data. Which
 5 colors are lost are determined by which 8-bit combination is chosen for the key.

For a 16-bit 555 video surface, a 1-bit key is used. FIG. 8 is a diagram illustrating a 16-bit chunk of data in 16-bit 555 RGB mode. As FIG. 8 shows, in 16-bit 555 RGB mode, video data has a 1-5-5-5 format (1 empty bit, 5 bits for red, 5 bits for green, 5 bits for red). The subpicture data is still in the standard 4-4 format (4 bits for the alpha and 4 bits for the index). Thus the remaining 8 bits in the stream are open when subpicture data is sent. However, since there is one unused bit in the video data, this bit is used as the key. This allows a solution without the loss of any color information in the video
 10 data.
 15

FIG. 9 is a flow diagram showing a method for rendering DVD subpicture data on a computer system having graphics information without a loss of subpicture resolution in accordance with a presently preferred embodiment of the present invention. At 200, a
 20 key is inserted into the subpicture data to indicate that the data is subpicture information. Then, at 202, the subpicture data is written to a primary surface, the primary surface also receiving the graphics data. At 204, the data is read out of the primary surface.

At 206, it is determined if the data read out of the primary surface is subpicture data or graphics data by looking for the key in the data. If the key exists, the data is subpicture data, and the method moves to 208, where the subpicture data is converted to an RGB value and an alpha value and the RGB value is blended with DVD video data according to the alpha value. If the data is graphics data, at 210 it is combined with DVD video data. This may require use of a color key if there is no alpha provided.

FIG. 10 is a block diagram illustrating a DVD subpicture data renderer in accordance with a presently preferred embodiment of the present invention. Since portions of the renderer may be implemented in hardware and portions in software, the different blocks and components will be discussed and pictured abstractly.

A key inserter 250 takes subpicture data and inserts a key to indicate that the data is subpicture information. Then, a subpicture data writer 252 writes the subpicture data to a primary surface 254. A primary surface reader 256 reads the data out of the primary surface. Video data is stored in the video surface 258 and read out by video surface reader 260.

The hardware components (the graphics chip in a presently preferred embodiment of the present invention) must be designed to correctly interpret the key (if any). Thus, A subpicture key select block 262 is preprogrammed to select specific bits that are used to

hold the key, the key indicating whether the data is subpicture or graphics information. A subpicture detect block 264, which may be simply a comparator, looks for a match to the subpicture key and indicating whether it is indeed a match. Alpha select block 266 selects the appropriate bits for the alpha, depending on the data format, while index select block 268 selects the appropriate bits for the index, again depending on the data format. Subpicture Palette 270 is a 16 x 24 bit look up table for translating the color information.

A color and chroma key detect block 272 is used if the data format is less than 32 bits, and thus there is no alpha field, because, as described earlier, it would be necessary to set aside a color to indicate pixels which are to be used to display video rather than graphics. Multiplexor 274 utilizes all this information and outputs an alpha value to the alpha blender 276, which then uses the alpha value to blend the graphics/subpicture information with the video information.

While embodiments and applications of this invention have been shown and described, it would be apparent to those skilled in the art having the benefit of this disclosure that many more modifications than mentioned above are possible without departing from the inventive concepts herein. The invention, therefore, is not to be restricted except in the spirit of the appended claims.

CLAIMS

What is claimed is:

- 5 1. A method for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture resolution including:
 - inserting a key into said subpicture data to indicate that said data is subpicture information and not the graphics data;
 - 10 writing said subpicture data to a primary surface, said primary surface also receiving said graphics data;
 - reading data out of said primary surface;
 - determining if said data read out of said primary surface is subpicture data or graphics data by looking for said key in said data;
 - 15 converting said subpicture data to an RGB value and an alpha value and blending said RGB value with DVD video data according to said alpha value if said data is subpicture data; and
 - combining said graphics data with said DVD video data if said data is graphics data.
- 20 2. The method of claim 1, wherein said primary surface is in 24-bit RGB mode.
3. The method of claim 2, wherein said subpicture data has 8 bits.

4. The method of claim 3, wherein said inserting includes inserting a 16-bit key into said subpicture data to indicate that said data is subpicture information and not the graphics data.

5.

5. The method of claim 4, wherein said 16-bit key is inserted into bits spread evenly among said 24 bits.

6. The method of claim 2, wherein said determining includes examining 16 bits of said data and comparing said 16 bits with a 16 bit combination reserved to indicate subpicture data.

7. The method of claim 1, wherein said primary surface is in 16-bit 565 RGB mode.

8. The method of claim 7, wherein said subpicture data has 8 bits.

9. The method of claim 8, wherein said inserting includes inserting an 8-bit key into said subpicture data to indicate that said data is subpicture information and not the graphics data.

20

10. The method of claim 9, wherein said 8-bit key is inserted into bits spread evenly among said 16 bits.

11. The method of claim 9, wherein said determining includes examining 8 bits of said data and comparing said 8 bits with a 8 bit combination reserved to indicate subpicture data.

5

12. The method of claim 1, wherein said primary surface is in 16-bit 555 RGB mode, wherein said 16-bit 555 RGB mode provides 5 bits for red information, 5 bits for green information, 5 bits for blue information, and 1 empty bit.

10

13. The method of claim 12, wherein said subpicture data has 8 bits.

10

14. The method of claim 13, wherein said inserting includes inserting an 1-bit key into the empty bit of said subpicture data to indicate that said data is subpicture information and not the graphics data.

15

15. The method of claim 12, wherein said determining includes examining 1 bit of said data and comparing said 1 bit with a 1 bit combination reserved to indicate subpicture data.

20 16. The method of claim 1, wherein said combining includes creating an alpha value based on whether said graphics data represents a color set aside as a key color and combining said graphics data and said DVD video data according to said alpha value.

17. A method for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture resolution including:

5 inserting a key into said subpicture data to indicate that said data is subpicture information and not the graphics data; and

writing said subpicture data to a primary surface, said primary surface also receiving said graphics data.

18. A DVD subpicture data renderer including:

a memory having a primary surface and a video surface;

a key inserter;

a subpicture data writer coupled to said key inserter and coupled to said primary surface;

5 a primary surface reader coupled to said primary surface;

a subpicture key select block coupled to said primary surface reader;

a subpicture detector coupled to said subpicture key select block;

an index select block coupled to said primary surface reader;

a subpicture palette coupled to said index select block;

20 an alpha select block coupled to said primary surface reader;

a multiplexor having a plurality of inputs and an output, one of said inputs coupled to said alpha select block and another of said inputs coupled to said subpicture detector;

a video surface reader coupled to said video surface; and

an alpha blender coupled to said subpicture palette, said multiplexor, and said video surface reader.

5 19. The DVD subpicture data renderer of claim 18, further including a color and chroma key detect block coupled to said primary surface reader, said video surface reader, and said alpha blender.

10 20. The DVD subpicture data renderer of claim 18, wherein said primary surface reader is contained in a graphics engine on a graphics chip.

21. The DVD subpicture data renderer of claim 18, wherein said video surface reader is contained in a video engine on a graphics chip.

15 22. A DVD subpicture data renderer including:
a memory having a primary surface and a video surface;
a key inserter; and
a subpicture data writer coupled to said key inserter and coupled to said primary surface.

20

23. A DVD subpicture data renderer including:
a memory having a primary surface and a video surface;

a key inserter; and

a subpicture data writer coupled to said key inserter and coupled to said primary surface.

- 5 24. A program storage device readable by a machine, tangibly embodying a program of instructions executable by the machine to perform a method for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture resolution, the method including:

10 inserting a key into said subpicture data to indicate that said data is subpicture information and not the graphics data;

writing said subpicture data to a primary surface, said primary surface also receiving said graphics data;

reading data out of said primary surface;

15 determining if said data read out of said primary surface is subpicture data or graphics data by looking for said key in said data;

converting said subpicture data to an RGB value and an alpha value and blending said RGB value with DVD video data according to said alpha value if said data is subpicture data; and

20 combining said graphics data with said DVD video data if said data is graphics data.

25. A program storage device readable by a machine, tangibly embodying a program of instructions executable by the machine to perform a method for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture

5 resolution, the method including:

inserting a key into said subpicture data to indicate that said data is subpicture information and not the graphics data; and

writing said subpicture data to a primary surface, said primary surface also receiving said graphics data.

ABSTRACT

A method and apparatus for rendering DVD subpicture data on a computer system having graphics data without a loss of subpicture resolution includes inserting a key into the subpicture data during or right after decoding and storing the subpicture data in the primary graphics surface. This key indicates whether the data is graphics (GUI) information or subpicture information. The key is then examined by hardware logic in the graphics chip, allowing other hardware logic to blend DVD subpicture data with DVD video data without losing subpicture color resolution. The key may be implemented differently for different color modes of the primary surface, and may be unnecessary in certain modes.

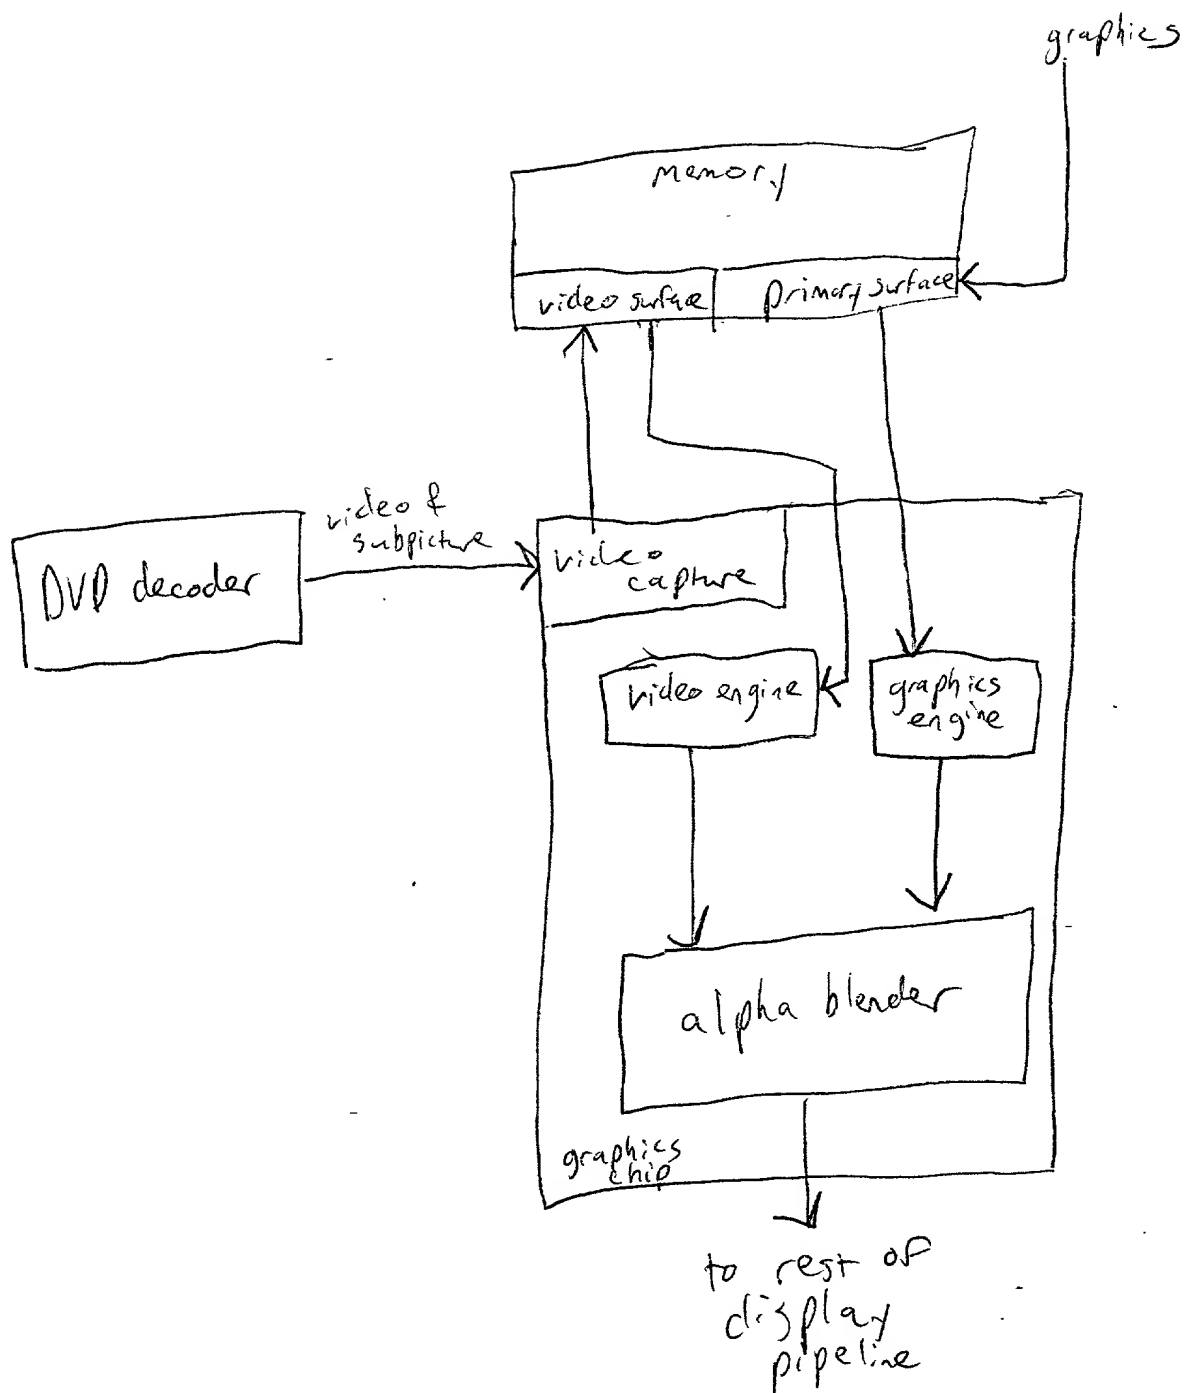


FIG. 1

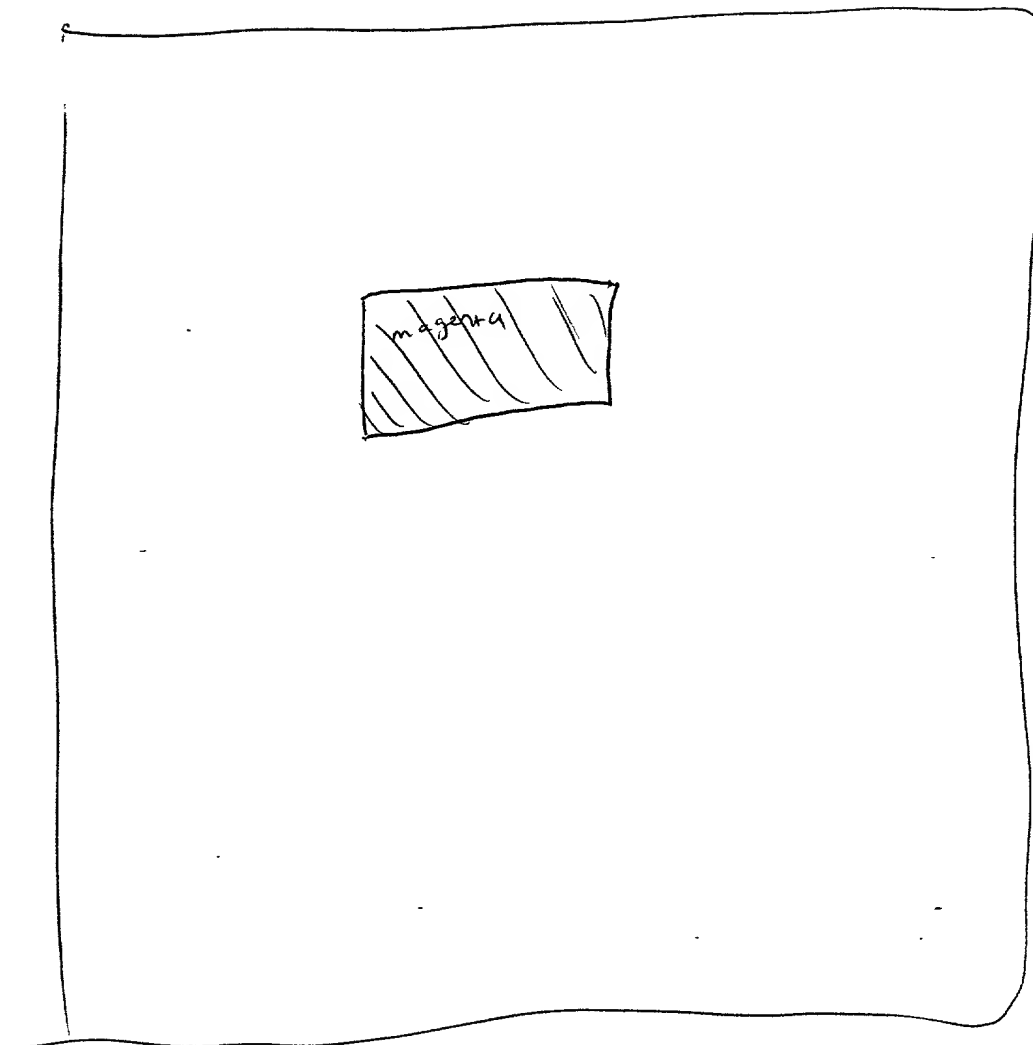


FIG. 2

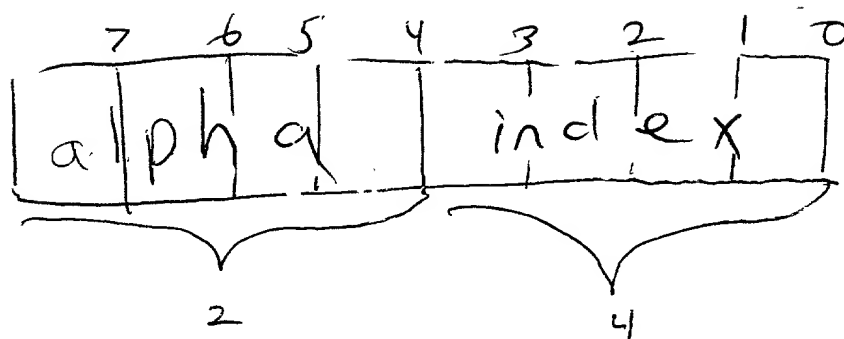


FIG. 3


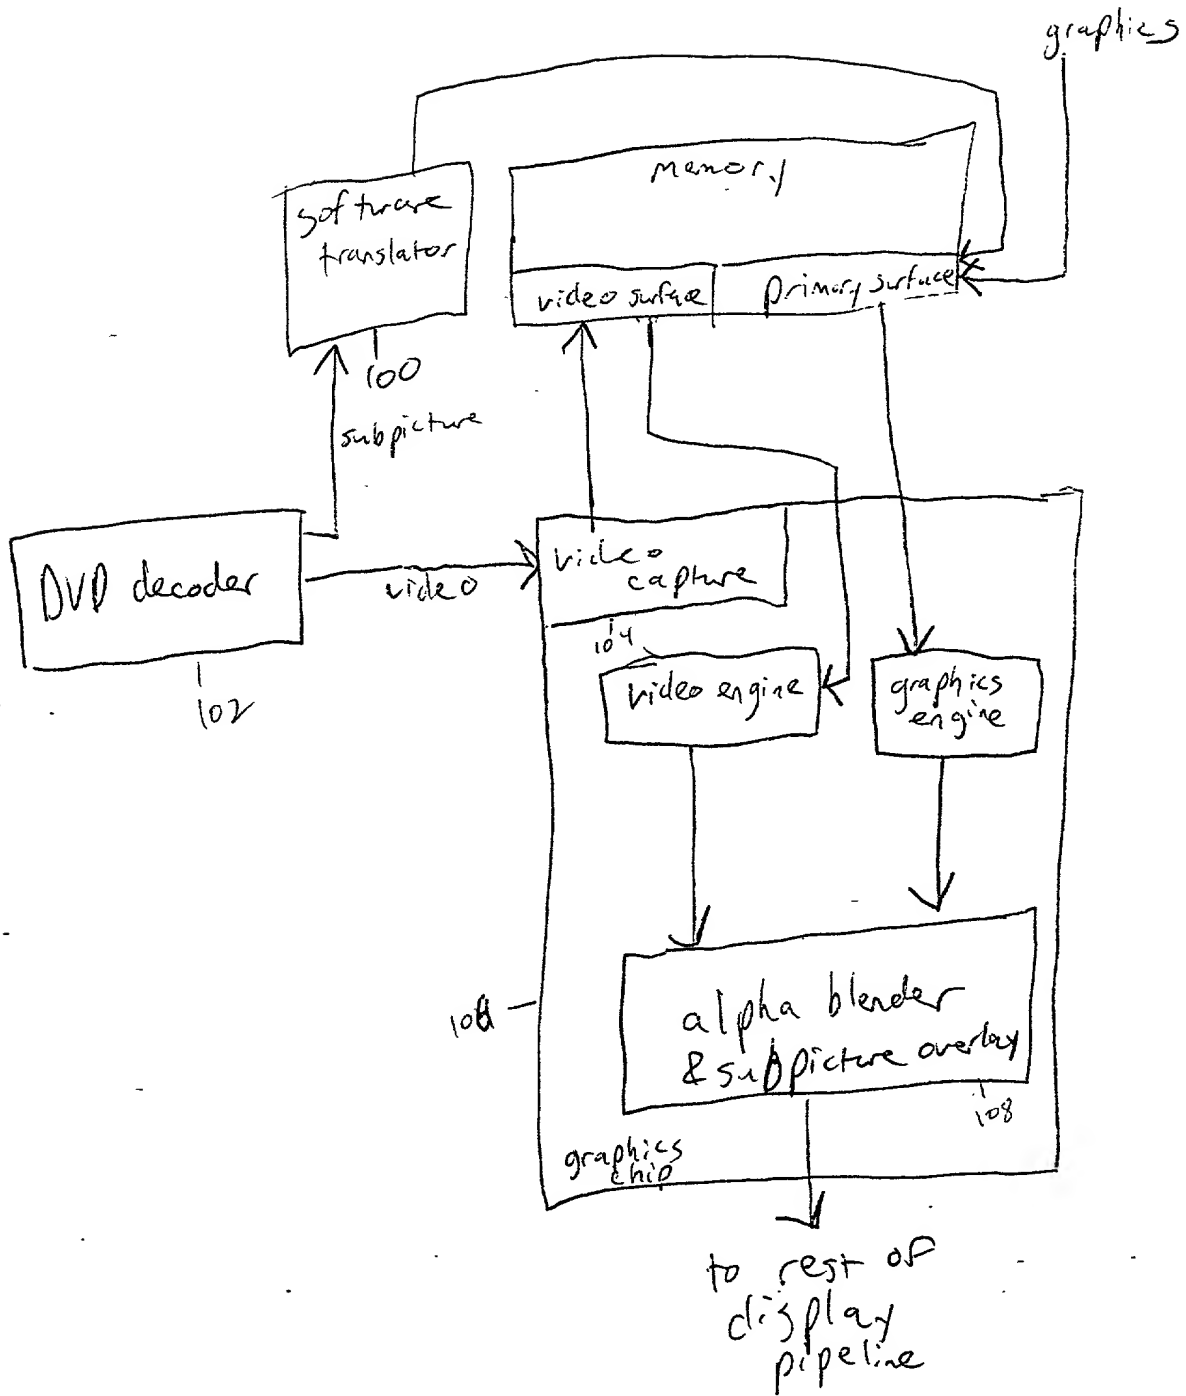


FIG. 4

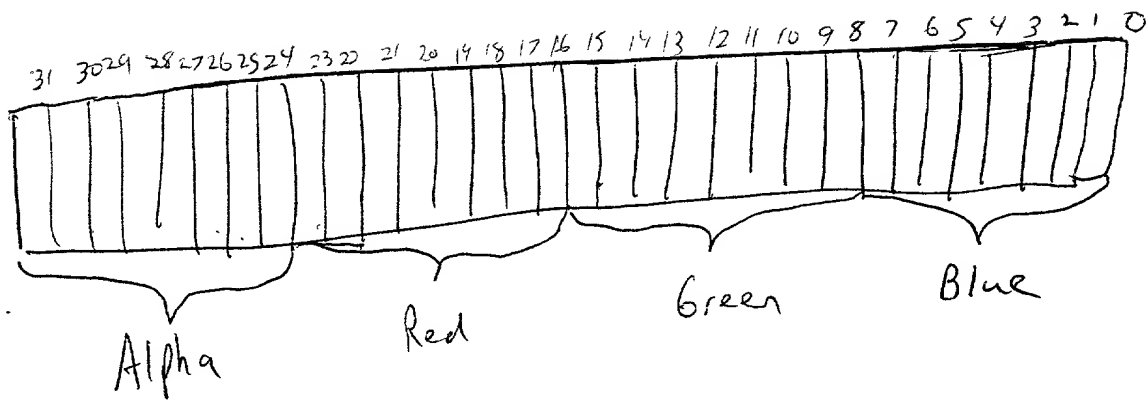

≤ 16.5

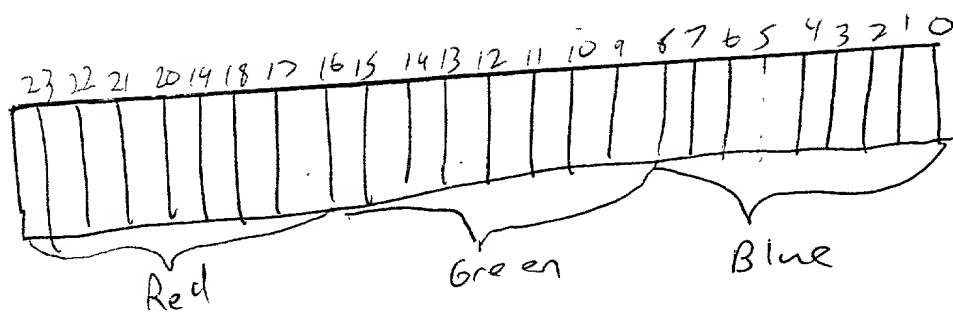


FIG. 6


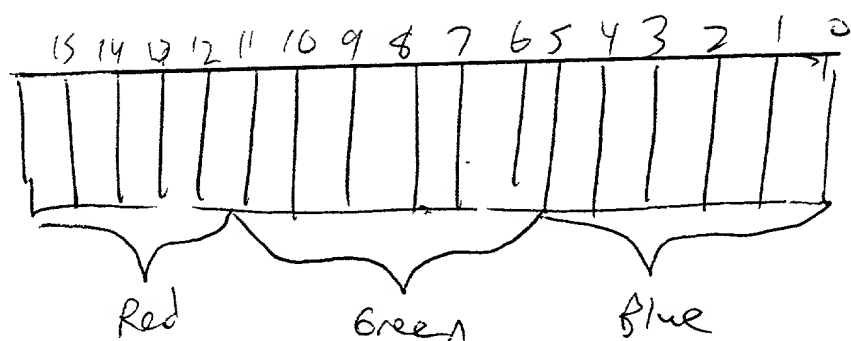


Fig. 7

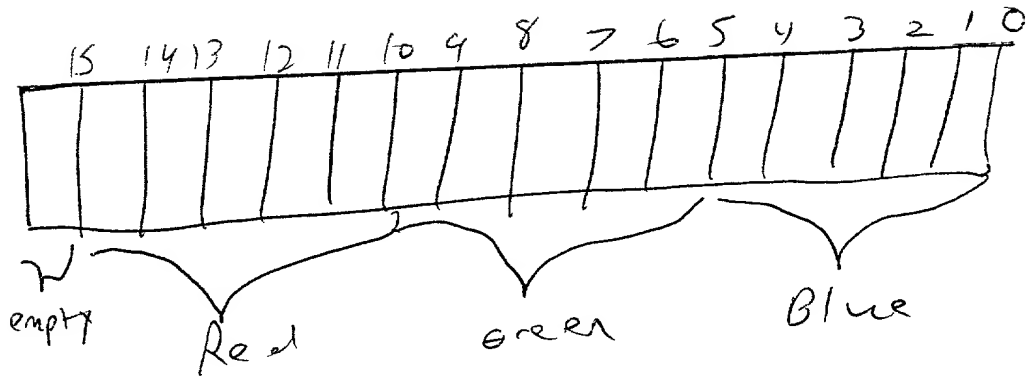

F16.8

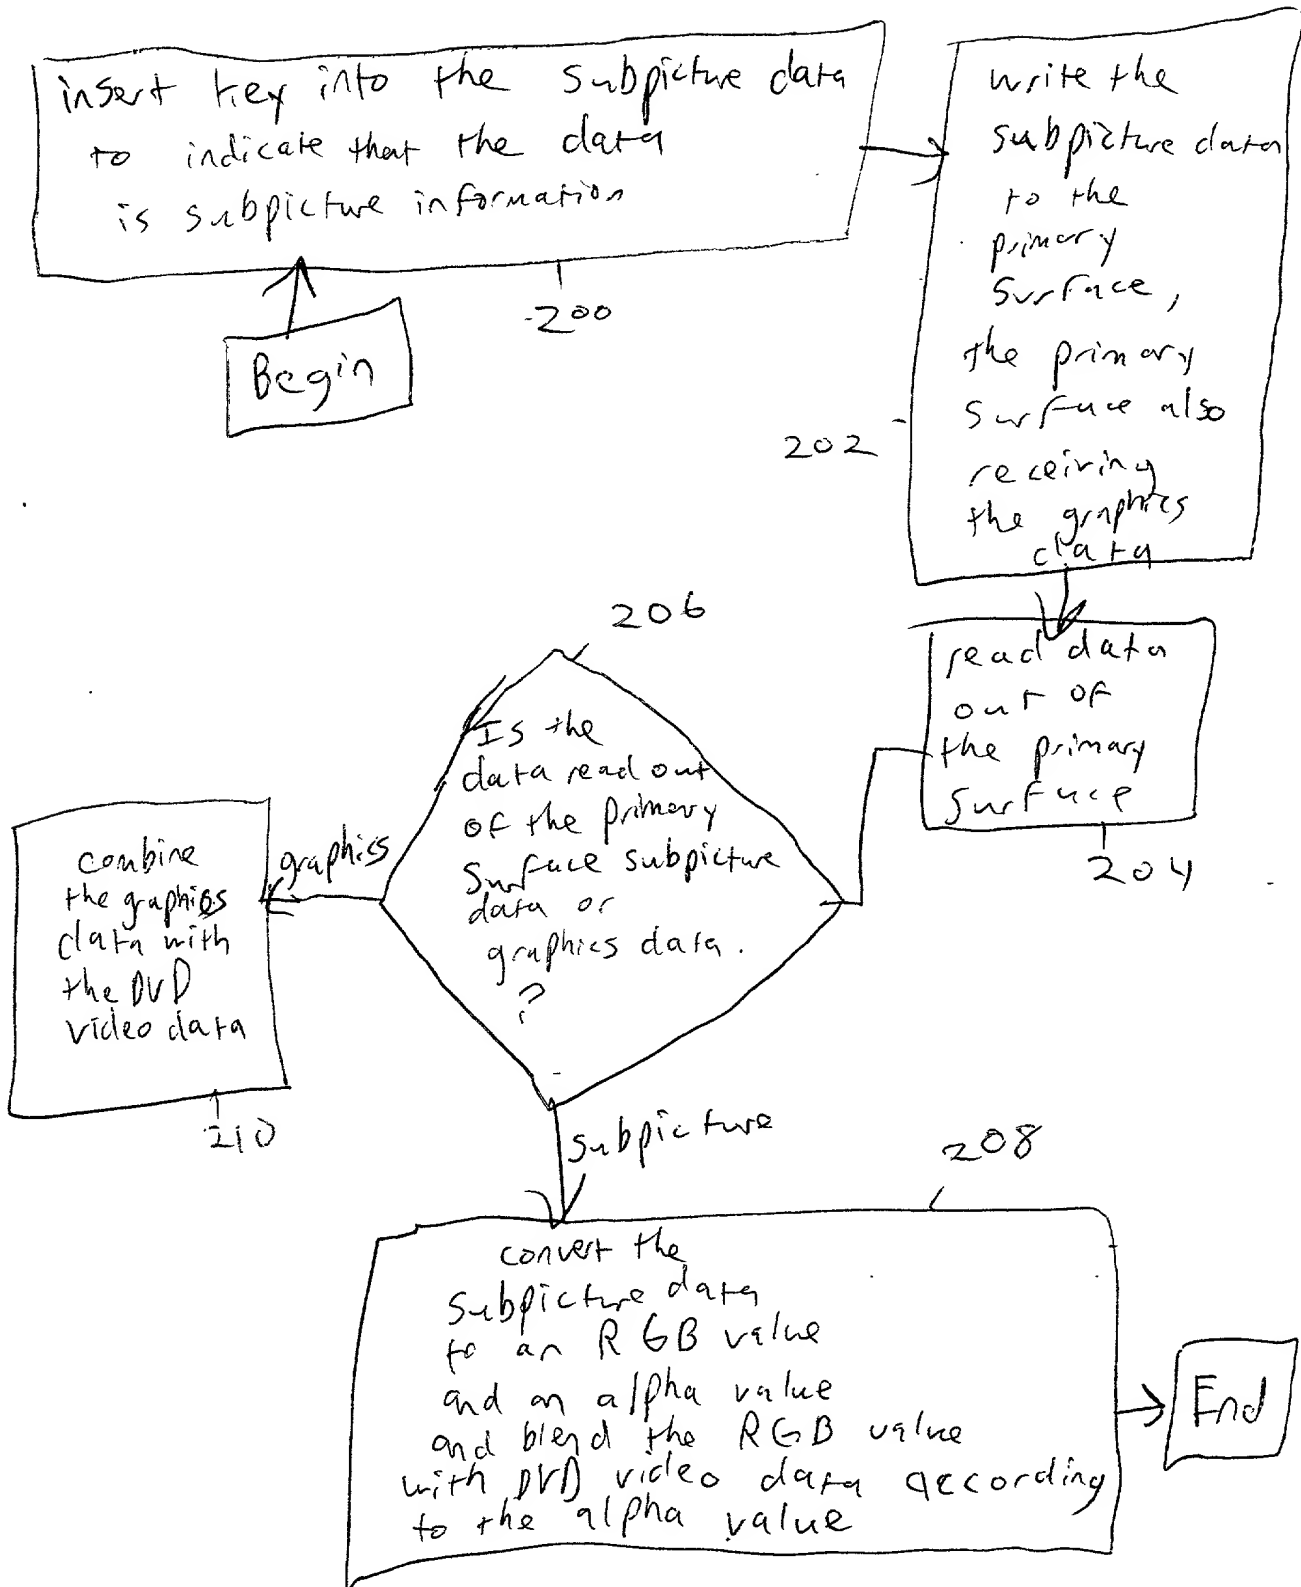


FIG. 9

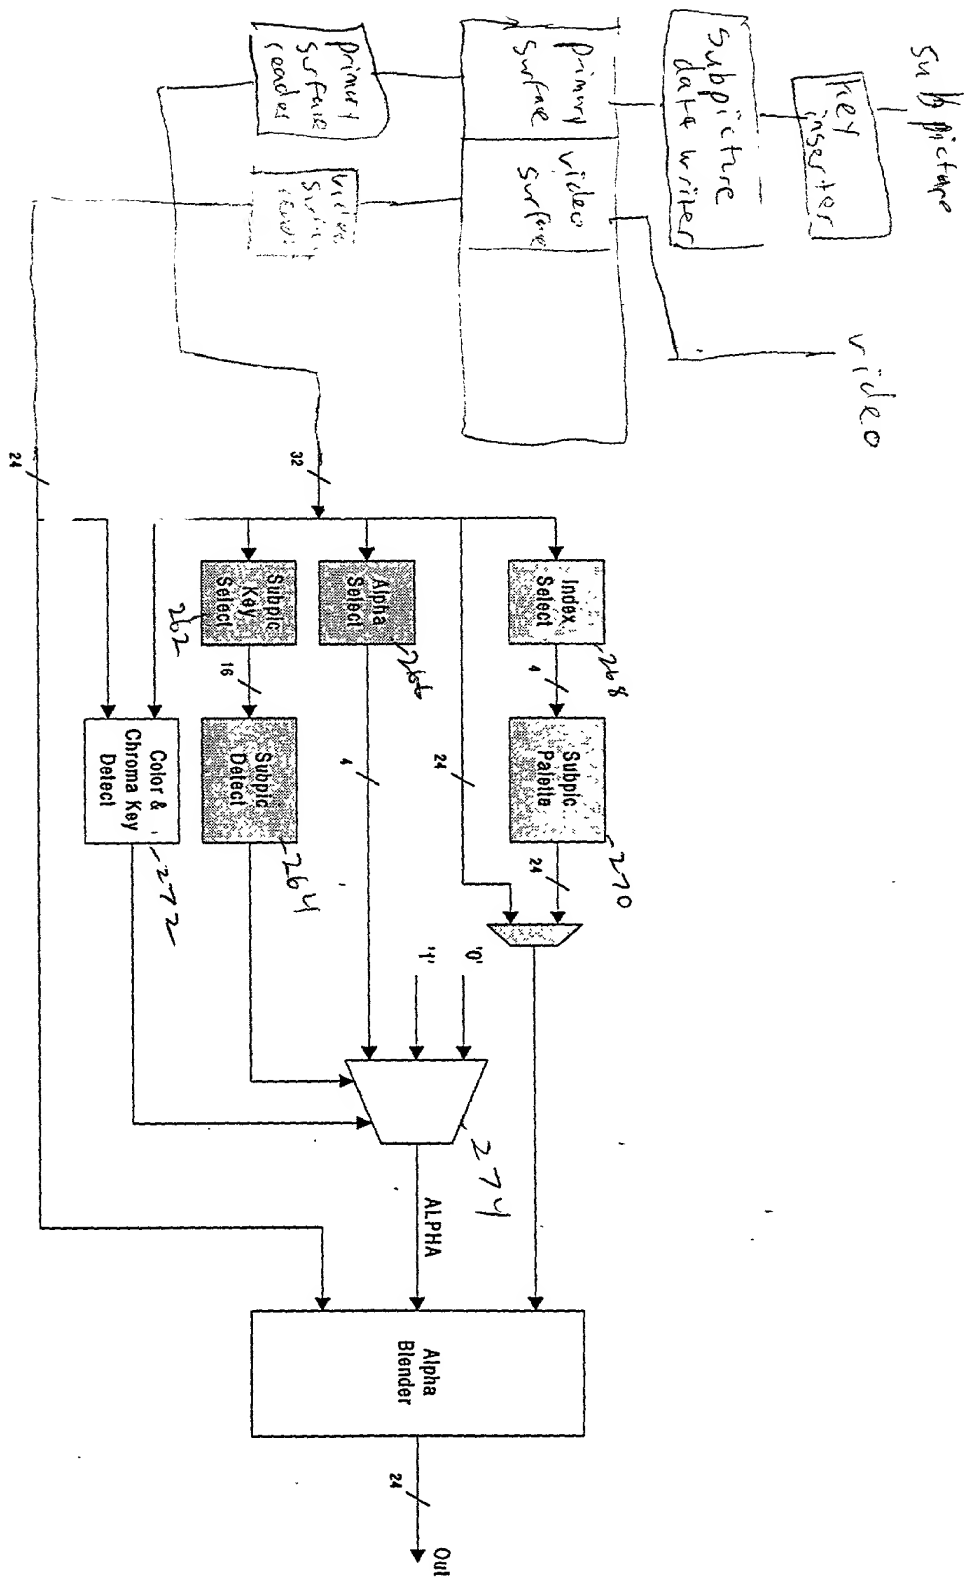


FIG. 10